

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
17 June 2004 (17.06.2004)

PCT

(10) International Publication Number
WO 2004/052020 A1

(51) International Patent Classification: **H04N 7/52**

(21) International Application Number:
PCT/IB2003/005440

(22) International Filing Date:
26 November 2003 (26.11.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/430,919 4 December 2002 (04.12.2002) US

(71) Applicant (for all designated States except US): **KONINKLIJKE PHILIPS ELECTRONICS N.V.** [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **MANI, Murali** [US/US]; P.O. Box 3001, Briarcliff Manor, NY 10510-8001 (US). **SHEN, Richard, Chi-Te** [US/US]; P.O. Box 3001, Briarcliff Manor, NY 10510-8001 (US). **CAVALLERANO, Alan, P.** [US/US]; P.O. Box 3001, Briarcliff Manor, NY 10510-8001 (US).

(74) Common Representative: **KONINKLIJKE PHILIPS ELECTRONICS N.V.; INTELLECTUAL PROPERTY & STANDARDS**, c/o Waxler, Aaron, P.O. Box 3001, Briarcliff Manor, NY 10510-8001 (US).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declaration under Rule 4.17:


— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for all designations

Published:

— with international search report
— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: SYNCHRONIZATION OF SIGNALS

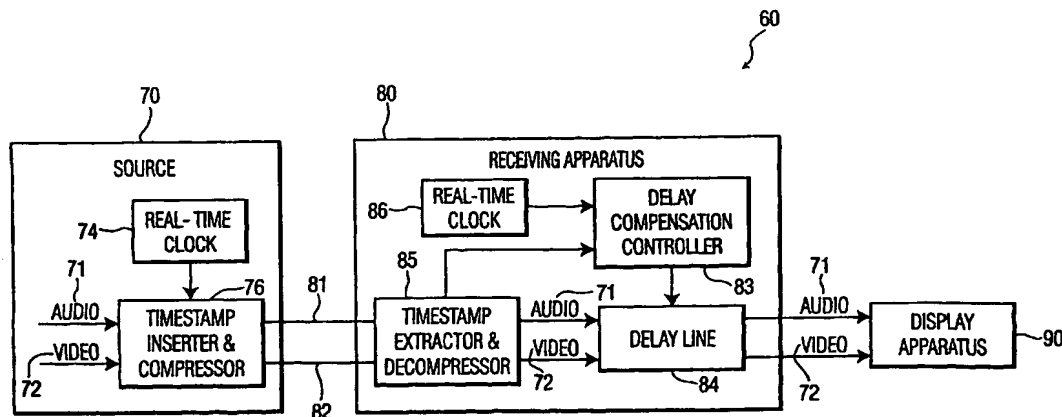

(57) Abstract: A method and system for synchronizing signals. First and second signals are sent (compressed or uncompressed) from a source to a receiving apparatus of a receiving system. The first signal has content of a first modality (e.g., audio) and the second signal has content of a second modality (e.g., video). The first and second signals are to be displayed on a display apparatus of the receiving system. The first and second signals have been time-synchronized at the source. If the first and second signals are not synchronized in time when received at the receiving apparatus, then the first and second signals may be time-synchronized at the receiving apparatus either manually or through timestamping of both signals at the source, in conjunction with use of a real-time clock at the receiving apparatus.

Post Available Copy

WO 2004/052020 A1

SYNCHRONIZATION OF SIGNALS

The present invention relates to a method and system for synchronizing signals.

A practical technology for generally synchronizing audio and video signals transmitted from a sender to a receiver does not exist. Thus there is a need for a method and system to

5 generally synchronize audio and video signals transmitted from a sender to a receiver.

The present invention provides a method for synchronizing signals, comprising:

receiving, from a source, a first signal and a second signal by a receiving apparatus of a receiving system, the first and second signals to be displayed on a display apparatus of the receiving system, the first and second signals having been time-synchronized at the source,
10 the first signal having content of a first modality, the second signal having content of a second modality;

displaying on the display the first and second signals, said displayed first and second signals being accessible to a user; and

manually reducing, by the user, the time rate of displaying one of the first signal and the
15 second signal, said manually reducing being directed to time-synchronizing said displaying of the first and second signals on the display apparatus.

The present invention provides a system for synchronizing signals, comprising:

receiving means for receiving, from a source, a first signal and a second signal by a receiving apparatus of a receiving system, the first and second signals to be displayed on a
20 display apparatus of the receiving system, the first and second signals having been time-synchronized at the source, the first signal having content of a first modality, the second signal having content of a second modality;

display means for displaying on the display the first and second signals, said displayed first and second signals being accessible to a user; and

25 manual reducing means for manually reducing, by the user, the time rate of displaying one of the first signal and the second signal, said manually reducing being directed to time-synchronizing said displaying of the first and second signals on the display apparatus.

The present invention provides a method for synchronizing signals, comprising:

receiving, from a source, a first signal and a second signal by a receiving apparatus of a
30 receiving system, the first and second signals to be synchronously displayed on a display apparatus of the receiving system, the first and second signals having been time-synchronized at the source, the first signal having content of a first modality and a first plurality of time stamps originating from the source, the second signal having content of a

second modality and a second plurality of time stamps originating from the source, the second plurality of time stamps being synchronized with the first plurality of time stamps; determining at a plurality of times on a real-time clock CR at the receiving system whether the first and second signals are time-synchronized relative to the clock CR, said

5 determining being based on analyzing the first and second plurality of time stamps in relation to the clock CR; and

reducing the time rate of displaying one of the first signal and the second signal when said determining determines that the first and second signals are not time-synchronized relative to the clock CR such that the one is time advanced relative to the remaining other of the
10 first signal and the second signal, said reducing being directed to time-synchronizing said displaying of the first and second signals on the display apparatus.

The present invention provides a system for synchronizing signals, comprising:

receiving means for receiving, from a source, a first signal and a second signal by a receiving apparatus of a receiving system, the first and second signals to be synchronously
15 displayed on a display apparatus of the receiving system, the first and second signals having been time-synchronized at the source, the first signal having content of a first modality and a first plurality of timestamps originating from the source, the second signal having content of a second modality and a second plurality of timestamps originating from the source, the second plurality of time stamps being synchronized with the first plurality
20 of time stamps;

determining means for determining at a plurality of times on a real-time clock CR at the receiving system whether the first and second signals are time-synchronized relative to the clock CR, said determining being based on analyzing the first and second plurality of timestamps in relation to the clock CR; and

25 reducing means for reducing the time rate of displaying one of the first signal and the second signal when said determining determines that the first and second signals are not time-synchronized relative to the clock CR such that the one is time advanced relative to the remaining other of the first signal and the second signal, said reducing being directed to time-synchronizing said displaying of the first and second signals on the display apparatus.

30 The present invention advantageously provides a method and system to generally synchronize audio and video signals transmitted from a sender to a receiver.

FIG. 1 is a block diagram of a system for manually synchronizing signals, in accordance with embodiments of the present invention.

FIG. 2 is a flow chart describing manual synchronisation of signals in conjunction with the manual system of FIG. 1, in accordance with embodiments of the present invention.

FIG. 3 is a block diagram of an automated system for synchronizing signals using timestamps, in accordance with embodiments of the present invention.

- 5 FIG. 4 is a flow chart describing synchronisation of signals using timestamps in conjunction with the automated system of FIG. 3, in accordance with embodiments of the present invention.

FIG. 5 illustrates definitions of parameters appearing in the flow chart of FIG. 4, in accordance with embodiments of the present invention.

- 10 FIG. 6 is a table describing timestamp content for uncompressed and compressed signals in conjunction with the automated system of FIGS. 3-4 in accordance with embodiments of the present invention.

FIG. 7 is a table listing signal modality combinations, in accordance with embodiments of the present invention.

- 15 The present invention discloses a manual method and system, as well as an automated method and system, for synchronizing two or more signals transmitted from a source (i.e., a sender) to a receiver on separate channels. The modality of a signal is indicative of the type of content carried by the signal. Examples of modalities include a video modality, an audio modality, and a text modality, and the signals having these modalities are called
- 20 video signals, audio signals, and text signals, which carry video content, audio content, and text content, respectively. FIG. 7 is a table listing signal modality combinations as pairs of modality types wherein the different modalities of such a pair may characterize signals being transmitted from the source to the receiver on separate channels, in accordance with embodiments of the present invention. The signal modality combinations in FIG. 7
- 25 include: a video modality and an audio modality, a video modality and a text modality, and an audio modality and a text modality. Although the embodiments of the present invention are described infra in terms of synchronizing an audio signal with a video signal, or vice versa, the scope of the present invention includes synchronizing signals having any modalities. As indicated supra, the signals transmitted from the source may have different
- 30 modalities (e.g., an audio modality for a first signal transmitted from the source and a video modality for a second signal transmitted from the source). Nonetheless, the scope of the present invention includes the case in which the signals transmitted from the source have the same modality (e.g., a video modality for a first signal transmitted from the source

and a video modality for a second signal transmitted from the source; an audio modality for a first signal transmitted from the source and an audio modality for a second signal transmitted from the source).

5 The signals sent to a receiver from the source are assumed to be time-synchronized at the source in accordance; e.g., with a real-time clock at the source or studio "genlock" signals at the source. Said signals, after being sent from the source and before being received at the receiver, may be delayed in transmission due to, inter alia, process delay. For example, time delay may be caused by a signal going through many multiplex (broadcast) points; at each such broadcast point the signal may be edited, or there may be other process delay

10 (e.g., processing due to inserting special effects into the video). Thus, the transmission path itself may change the timing of the audio and video signals differentially, since the audio and video signals travel along different transmission paths and are subject to different processing steps. As a result, the audio and video signals may not be time synchronized when the audio and video signals arrive at the receiver. The scope of the

15 present invention includes cases in which the audio and video signals are not time synchronized when the audio and video signals arrive at the receiver, for any reason. As a first example, the audio and video signals may not be time synchronized when arriving at the receiver, because the first signal and the second signal are received at the receiver on separate channels. As a second example, the audio and video signals may not be time

20 synchronized when arriving at the receiver, because the first signal and the second signal are received at the receiver as not multiplexed with each other. As a third example, the audio and video signals may not be time synchronized when arriving at the receiver, because the first signal and the second signal are received at the receiver as multiplexed but not time-synchronized with each other. The present invention is directed to synchronizing

25 the audio and video signals at the receiver when the audio and video arrive out of synch at the receiver.

FIGS. 1-2 relate to the manual method and system of the present invention for synchronizing an audio and video signal with each other. FIGS. 3-6 relate to the automated method and system of the present invention for synchronizing an audio and

30 video signal with each other. The audio and video signals are assumed to be content related, which means that the audio and video signals are components of a common program or other presentation such as a movie or television program, so that corresponding portions of the audio and video signals are intended to be played back together as the

common program or other presentation is being played back. Definitionally, the audio and video signals (or any plurality of signals having different modalities, or the same modality, for their content) are said to be synchronized if they are synchronized in time, which means that when the audio and video signals are played back, in accordance with the common
5 program or other presentation being played back, said corresponding portions of the audio and video signals may be played back simultaneously. Thus the words "synchronize" and "time-synchronize" (and variants thereof) have the same meaning herein.

FIG. 1 is a block diagram of a system 10 for manually synchronizing signals, in accordance with embodiments of the present invention. The system 10 is adapted to
10 receive an audio signal 21 and a video signal 22 from a source 20. The source 20 functions as a sender of the audio signal 21 on audio channel 31, and a video signal 22 on video channel 32, to the system 10. The audio signal 21 and the video signal 22 are each either in an uncompressed format or in a compressed format, as sent by the source 20 and as received by the system 10. The video signal 22 is either in an uncompressed format or in a
15 compressed format, as sent by the source 20 and as received by the system 10. The source 10 includes a real-time clock 24 which may be used to synchronize 26 the audio signal 21 with the video signal 22, although said synchronization between the audio signal 21 and the video signal 22 may alternatively be achieved by other methods such as, inter alia, utilizing a "genlock" signal at the source 20. If either or both of the audio signal 21 and
20 the video signal 22 are sent to the system 10 in a compressed format, the synchronization 26 between the audio signal 21 and the video signal 22 is effectuated prior to said compression.

The system 10 includes a receiving apparatus 30, a display apparatus 40 and a user apparatus 44. The receiving apparatus 30 includes a decompressor 35, a delay
25 compensation circuit 33, and a delay line 34. The delay compensation circuit 33 is coupled to the delay line 34. As explained supra, the audio signal 21 and the video signal 22 may arrive at the receiving apparatus 30 out of time synchronization with each other.

The display apparatus 40, which may include a control 42, may be any type of apparatus known by one of ordinary skill in the art as being capable of displaying the pertinent
30 signals. For example, the display apparatus 40 may comprise a speaker for displaying the audio signal 21. As another example, the display apparatus 40 may comprise a television screen or computer monitor for displaying the video signal 22. The display apparatus 40 is coupled to the delay line 34 of the receiving apparatus 30.

The user apparatus 44 comprises user input 45 and may additionally comprise a wireless control 47. At least one of the control 42 and the wireless control 47 must be present.

Thus, the user input 45 is coupled to at least one of the control 42 and the wireless control 47. The user input 45 may transfer input from a user to the delay compensation circuit 33 through the control 42, the wireless control 47, or both.

After being received by the receiving apparatus 30, the audio signal 21 is decompressed by the decompressor 35 if the audio signal 21 was sent by the source 20 in compressed format, and the video signal 22 is decompressed by the decompressor 35 if the video signal 22 was sent by the source 20 in compressed format. Next, the audio signal 21 and the video signal 22 enter the delay line 34 where one or both of said signals are subject to being delayed or slowed down under control of the delay compensation circuit 33. The delay line 34 may include one or more buffers for storing the audio signal 21 and the video signal 22.

The display apparatus 40 is adapted to display the audio signal 21 and the video signal 22. The audio signal 21 and the video signal 22 being displayed on the display apparatus 40 are accessible to a user; i.e., the audio signal 21 may be heard by the user and the video signal 22 may be seen by the user. The user may manually reduce the time rate of displaying the one signal (i.e., the "advanced" signal) of the audio signal 21 and the video signal 22 that is ahead of the other remaining signal (i.e., the "retarded" signal), so as to time-synchronize the displaying of the audio signal 21 and the video signal 22 on the display apparatus 40. This synchronization is accomplished by transmitting user input 45 from the user to the delay compensation circuit 33 via the control 41 on the display apparatus 40 or via the wireless control 47. The user input 45 comprises a delay directive from a user to the delay compensation circuit 33. The control 41 and the wireless control 47 each comprise any input device or mechanism (e.g., a keyboard, mouse, turnable knob, etc) capable of transmitting the user input 45 to the delay compensation circuit 33.

The time rate of displaying the advanced signal may be reduced continuously via the delay compensation circuit 33 such as by reducing the transmission rate or display rate of the advanced signal. For example, the user may turn a knob on the control 41 or wireless control 47 such that said time rate of displaying increases as the knob is turned clockwise and said time rate of displaying decreases as the knob is turned counterclockwise. The time rate of displaying the advanced signal may alternatively be reduced discontinuously

by introducing a time delay gap in the advanced signal via the delay compensation circuit 33. The time delay gap is an interval of time during which the advanced signal is held in suspension and is not being further transmitted. For example, the user may press a button that acts as a toggle switch: pressing the button a first time stops transmission of the advanced signal and pressing the button a second time resumes transmission of the advanced signal.. The advanced signal is frozen within the one or more buffers of the delay line 34 for the period of the time delay gap.

FIG. 2 is a flow chart comprising steps 51-56 which describe manual synchronization of signals in conjunction with the manual system 10 of FIG. 1, in accordance with embodiments of the present invention. In step 51, the user samples the audio signal 21 (S1) and the video signal 22 (S2) by listening to audio signal 21 and viewing the video signal 22. Through said sampling, the user determines in step 52 whether the signals S1 and S2 are in synch (i.e., in synchronization with each other). If the signals S1 and S2 are in synch, then the user continues in step 51 to sample the signals S1 and S2. If and when the user determines that the signals S1 and S2 are not in synch, then the user determines in step 53 that one of the signals, namely S1 for example, is time-lagging the other signal S2. In step 54, the user manually reduces (continuously or discontinuously as described supra) the rate of displaying the signal S2 until the user is satisfied that the signals S1 and S2 are in synch. In step 55, the user decides whether to continue or stop sampling the signals S1 and S2. As a result, the user may stop sampling the signals S1 and S2 (step 56) or return to step 51 to continue to sample the signals S1 and S2.

FIG. 3 is a block diagram of an automated system 60 for synchronizing signals, in accordance with embodiments of the present invention. The system 60 is adapted to receive an audio signal 71 and a video signal 72 from a source 70. The source 70 functions as a sender of the audio signal 71 on audio channel 81, and as a sender of the video signal 72 on video channel 82, to the system 60. The audio signal 71 and the video signal 72 are each in either in an uncompressed format or in a compressed format, as sent by the source 70 and as received by the system 60. The video signal 72 is either in an uncompressed format or in a compressed format, as sent by the source 70 and as received by the system 60. The source 70 includes a real-time clock 74 which may synchronize 76 the audio signal 71 with the video signal 72, although said synchronization between the audio signal 71 and the video signal 72 may alternatively be achieved by other methods such as, inter alia, utilizing a "genlock" signal at the source 70. If either or both of the audio signal 71

and the video signal 72 are sent to the system 60 in a compressed format, the synchronization between the audio signal 71 and the video signal 72 is effectuated prior to said compression.

5 The timestamp inserter 76 inserts a plurality of timestamps into each of the audio signal 71 and the video signal 72. These timestamps will be subsequently utilized by the receiving apparatus 80 to synchronize the audio signal 71 and the video signal 72 if said signals arrived at the receiving apparatus 80 out of synch with each other. The timestamp content to be inserted in a given signal (i.e., the audio signal 71 or the video signal 72) depends on whether the given signal to be sent by the source to the receiving apparatus 80 is

10 uncompressed or compressed. If the given signal is uncompressed, then the timestamp includes a time (e.g., a time read from the real-time clock 74) that is inserted into the given signal as the given signal is being transmitted to the receiving apparatus 80, or alternatively when the given signal is being propagated at the rate of transmission at which the given signal is intended to be subsequently played back. The timestamp may be stored in a

15 location in the given uncompressed signal from which the timestamp can be later retrieved. For example, if the given uncompressed signal is a video signal, then the timestamp can be stored in, inter alia, blanking intervals between frames. As another example, if the given uncompressed signal is a audio signal, then the timestamp can be stored as a watermark in the audio signal. The watermark may include audio frequencies and/or audio amplitudes

20 that lie outside the range of human hearing.

If the given signal is compressed, then the timestamp includes: 1) a time (e.g., as read from the real-time clock 74), wherein the time corresponds to a location (L) in an uncompressed signal which was compressed to form the given signal; and 2) an identification of said location (L) in the uncompressed signal. The location (L) needs to be in the timestamp

25 because there is no precise correlation between the bits of a compressed signal and locations in the corresponding uncompressed signal. Thus the location (L) compensates for said lack of precise correlation. FIG. 1 indicates that the timestamp inserter 76 comprises the compression functionality if compression is relevant. This means that the timestamp may be inserted into the given signal while compression is occurring.

30 Alternatively, the given signal may be compressed first followed later by insertion of the timestamp into the compressed signal. The timestamp may be stored in any location in the given compressed signal from which the timestamp can be later retrieved. For example, the timestamp may be inserted between two logical compression units of the compressed

signal. FIG. 6 is a table summarizing the timestamp contents for the uncompressed signal format and the compressed signal format.

The system 60 includes a receiving apparatus 80 and a display apparatus 90. Although not shown, the system 60 may also include a user apparatus analogous to the user apparatus
5 shown in FIG. 1 and described supra. If the system 60 includes such a user apparatus, then the system 60 would have both manual capabilities and the automated capabilities described infra.

As explained supra, the audio signal 71 and the video signal 72 may arrive at the receiving apparatus 80 out of time synchronization with each other. The receiving apparatus 80
10 includes a real-time clock 86, a timestamp extractor 85, a delay compensation controller 83, and a delay line 84. The delay compensation controller 83 is coupled to the real-time clock 86, the delay line 84, and the timestamp extractor 85. The timestamp extractor 85 is coupled to the delay line 84. As indicated in FIG. 3, the timestamp extractor 85 also includes decompression means for decompressing whichever of the audio signal 71 and the
15 video signal 72 has been received by the receiving apparatus 80 in compressed format. Regardless of whether the audio signal 71 and the video signal 72 are received by the receiving apparatus 80 in uncompressed format or in compressed format, the timestamp extractor 85 extracts the timestamps from within the audio signal 71 and the video signal 72. The timestamps had been independently inserted into the audio signal 71 and the video
20 signal 72 by the timestamp inserter 76, and the timestamps are independently extracted from the audio signal 71 and the video signal 72 by the timestamp extractor 85.

The display apparatus 90, (which may also include a control such as the control 42 shown in FIG. 1 and described supra) may be any type of apparatus known by one of ordinary skill in the art as being capable of displaying the pertinent signals. For example, the
25 display apparatus 90 may comprise a speaker for displaying the audio signal 71. As another example, the display apparatus 90 may comprise a television screen or computer monitor for displaying the video signal 72. The display apparatus 90 is coupled to the delay line 84 of the receiving apparatus 80.

After having each timestamp extracted by the timestamp extractor 85, the audio signal 71
30 and the video signal 72 are transmitted into the delay line 84 where one or both of said signals are subject to being delayed or slowed down under control of the delay compensation controller 83. The delay line 84 may include one or more buffers for storing the audio signal 71 and the video signal 72. The audio signal 71 and the video signal 72

are transmitted from the delay line 84 into the display apparatus 90. The display apparatus 90 is adapted to display the audio signal 71 and the video signal 72.

The delay compensation controller 83 may effectuate a reduction in the time rate of displaying the one signal (i.e., the "advanced" signal) of the audio signal 71 and the video signal 72 that is ahead of the other remaining signal (i.e., the "retarded" signal), so as to time-synchronize the displaying of the audio signal 71 and the video signal 72 on the display apparatus 90. This synchronization is accomplished in accordance with FIG. 4, which is a flow chart describing synchronization of signals using timestamps, in accordance with embodiments of the present invention.

10 The flow chart of FIG. 4 comprises steps 91-96. As stated supra, the audio signal 71 and the video signal 72 have their timestamps extracted independently after the audio signal 71 and the video signal 72 enter the receiving apparatus 80 and are decompressed (if received in compressed format). For simplicity, let S1 represent the audio signal 71 and let S2 represent the video signal 72. In step 91, the delay compensation controller 83 samples a
15 timestamp from signal S1 or a timestamp from signal S2. Let the symbol T1 denote a normalized time of the timestamp from signal S1, wherein the normalized time T1 is the actual time of the timestamp plus an additive constant C1 that normalizes the timestamps of the signal S1 to the time frame of the real-time clock 86. For example, if the first timestamp existing in the signal S1 is "10:00AM" and is processed by the delay
20 compensation controller 83 when the delay compensation controller 83 reads the time on the real-time clock 86 as "9:30AM", then the additive constant C1 of 30 minutes of time is added to every timestamp value extracted from the signal S1 for normalization purposes. The parameter T1 is the timestamp value of time, relating to the signal S1, after said normalization. Said normalization makes it possible to make meaningful comparisons
25 between the timestamps of the signal S1 with the real-time clock 86 in order to detect whether the various timestamps of the signal S1 are out of synch with the real-time clock 86. Similarly, let the symbol T2 denote a normalized time of the timestamp from signal S2, wherein the normalized time T2 is the actual time of the timestamp plus an additive constant C2 that normalizes the timestamps of the signal S2 to the time frame of the real-
30 time clock 86. The additive constants C1 and C2 are independent of each other and may be positive, negative, or zero.

Step 92 compares the normalized timestamp time T1 of the signal S1 with the corresponding time TC1 on the clock 86. If T1 is in synch with the clock 86, then T1

equals TC1. Accordingly, step 92 calculates $\Delta T1 = TC1 - T1$, which represents an amount of time by which T1 is out of synch with the clock 86. If $\Delta T1 > 0$, then the signal S1 lags the clock 86 at time T1. If $\Delta T1 < 0$, then the signal S1 leads the clock 86 at time T1. If $\Delta T1 = 0$, then the signal S1 is in synch with the clock 86 at time T1.

- 5 Step 93 compares the normalized timestamp time T2 of the signal S2 with the corresponding time TC2 on the clock 86. If T2 is in synch with the clock 86, then T2 equals TC2. Accordingly, step 92 calculates $\Delta T2 = TC2 - T2$, which represents an amount of time by which T2 is out of synch with the clock 86. If $\Delta T2 > 0$, then the signal S2 lags the clock 86 at time T2. If $\Delta T2 < 0$, then the signal S2 leads the clock 86 at time T2. If
10 $\Delta T2 = 0$, then the signal S2 is in synch with the clock 86 at time T2. FIG. 5 is a time line illustrating the definitions of various parameters T1, TC1, $\Delta T1$, T2, TC2, and $\Delta T2$.

- Step 94 compares $\Delta T2$ with $\Delta T1$ to determine whether signal S2 is in synch with signal S1. If $\Delta T2 = \Delta T1$, then signal S2 is in synch with signal S1 and processing returns to step 91. If $\Delta T2 > \Delta T1$, then signal S2 is out of synch with signal S1 such that signal S2 lags
15 signal S1 and the rate of displaying signal S1 is reduced in step 95 by delay compensation controller 83 followed by returning to step 91. If $\Delta T2 < \Delta T1$, then signal S2 is out of synch with signal S1 such that signal S1 lags signal S2 and the rate of displaying signal S2 is reduced in step 95 by delay compensation controller 83 followed by returning to step 91. Step 94 may be performed every time a new value of $\Delta T1$ or $\Delta T2$ is calculated in step 92
20 or step 93. Alternatively, step 94 may be performed selectively and not following every calculation of $\Delta T1$ or $\Delta T2$. The time retardation of S1 in step 95 or of S2 in step 96 may be equal to $\Delta T2 - \Delta T1$ or $\Delta T1 - \Delta T2$, respectively, which neglects the fact that the comparison between T1 and T2 may be made at different times on the real-time clock 86; i.e., when $TC1 \neq TC2$. Improved accuracy may be obtained by using interpolation or
25 extrapolation on T1 to adjust $\Delta T1$ to compensate for TC1 differing from TC2, or by using interpolation or extrapolation on T2 to adjust $\Delta T2$ to compensate for TC2 differing from TC1. The scope of the present invention includes any numerical method of effectuating a time-retardation of signal S1 or of signal S2 as would be apparent to one of ordinary skill in the art.

- 30 The time rate of displaying the advanced signal may be reduced continuously such as by having the delay compensation controller 83 reduce the transmission rate or display rate of the advanced signal. (i.e., the one signal of the audio signal 71 and the video signal 72 that is ahead of the other remaining signal). The time rate of displaying the advanced signal

may alternatively be reduced by having the delay compensation controller 83 introduce a time delay gap in the advanced signal via freezing the advanced signal in the one or more buffers of the delay line 84 for the period of the time delay gap. The time delay gap is an interval of time during which the advanced signal is held in suspension and is not being
5 further transmitted.

The present invention is generally applicable to any situation in which different signals transmitted from a source to a receiver are time synchronized at the receiver. As an example, the present invention may be applied to a video game in which the audio and video signals for the video game may arrive at receiver (where one or more players of the
10 game are located) out of time synchronization with respect to each other. The out-of-synch signal conditions may occur periodically so that the corrective action disclosed by the present invention (i.e., reducing the rate of displaying the audio signal or the video signal) may be applied conditionally. Depending on the nature of the video game, it may even be desirable at times not to take corrective action according to the present invention when out-
15 of-synch signal conditions occur under some special circumstances relating to the video game.

While embodiments of the present invention have been described herein for purposes of illustration, many modifications and changes will become apparent to those skilled in the art. Accordingly, the appended claims are intended to encompass all such modifications
20 and changes as fall within the true spirit and scope of this invention

CLAIMS:**1. A method for synchronizing signals, comprising:**

receiving, from a source, a first signal and a second signal by a receiving apparatus
of a receiving system, the first and second signals to be displayed on a display apparatus of
5 the receiving system, the first and second signals having been time-synchronized at the
source, the first signal having content of a first modality, the second signal having content
of a second modality;

displaying on the display apparatus the first and second signals, said displayed first
and second signals being accessible to a user; and

10 manually reducing, by the user, the time rate of displaying one of the first signal
and the second signal, said manually reducing being directed to time-synchronizing said
displaying of the first and second signals on the display apparatus.

2. The method of claim 1, wherein said manually reducing comprises:

15 manually directing a delay compensation circuit of the receiving apparatus to
electronically reduce said time rate of displaying; and

electronically reducing, by the delay compensation circuit, said time rate.

3. The method of claim 1, wherein said manually reducing comprises introducing a time

20 delay gap in the displaying of said one of the first signal and the second signal.

**4. The method of claim 1, wherein said manually reducing does not comprise introducing a
time delay gap in the displaying of said one of the first signal and the second signal.**

5. The method of claim 1, wherein said manually reducing comprises manually manipulating a control.

6. The method of claim 5, wherein said control is on the display apparatus.

5

7. The method of claim 5, wherein said control is on a wireless device.

8. The method of claim 1, wherein the first modality differs from the second modality.

9. The method of claim 8, wherein the first modality is a video modality, and wherein the
10 second modality is an audio modality.

10. The method of claim 8, wherein the first modality is a video modality, and wherein the
second modality is an text modality.

11. The method of claim 8, wherein the first modality is an audio modality, and wherein
15 the second modality is a text modality.

12. The method of claim 1, wherein said receiving the first signal and the second signal
comprises receiving the first signal and the second signal on separate channels.

20

13. The method of claim 1, wherein said receiving the first signal and the second signal
comprises receiving the first signal and the second signal as not multiplexed with each
other.

14. The method of claim 1, wherein said receiving the first signal and the second signal
25 comprises receiving the first signal and the second signal as multiplexed but not time-
synchronized with each other.

15. A system for synchronizing signals, comprising:

receiving means for receiving, from a source, a first signal and a second signal by a receiving apparatus of a receiving system, the first and second signals to be displayed on a display apparatus of the receiving system, the first and second signals having been time-synchronized at the source, the first signal having content of a first modality, the second signal having content of a second modality;

display means for displaying on the display apparatus the first and second signals, said displayed first and second signals being accessible to a user; and

manual reducing means for manually reducing, by the user, the time rate of displaying one of the first signal and the second signal, said manually reducing being directed to time-synchronizing said displaying of the first and second signals on the display apparatus.

16. The system of claim 15, wherein said manually reducing comprises:

directing means for manually directing a delay compensation circuit of the receiving apparatus to electronically reduce said time rate of displaying; and

electronic reducing means for electronically reducing, by the delay compensation circuit, said time rate.

17. The system of claim 15, wherein said manually reducing comprises introducing a time delay gap in the displaying of said one of the first signal and the second signal.

18. The system of claim 15, wherein said manually reducing does not comprise introducing a time delay gap in the displaying of said one of the first signal and the second signal.

19. The system of claim 15, wherein said manual reducing means comprises a control.
20. The system of claim 19, wherein said control is on the display apparatus.
- 5 21. The system of claim 19, wherein said control is on a wireless device.
22. The system of claim 15, wherein the first modality differs from the second modality.
23. The system of claim 22, wherein the first modality is a video modality, and wherein the
10 second modality is an audio modality.
24. The system of claim 22, wherein the first modality is a video modality, and wherein the second modality is an text modality.
- 15 25. The system of claim 22, wherein the first modality is an audio modality, and wherein the second modality is a text modality.
26. The system of claim 15, wherein said receiving means comprises means for receiving the first signal and the second signal on separate channels.
- 20 27. The system of claim 15, wherein said receiving means comprises means for receiving the first signal and the second signal as not multiplexed with each other.
28. The system of claim 15, wherein said receiving means comprises means for receiving
25 the first signal and the second signal as multiplexed but not time-synchronized with each other.

29. A method for synchronizing signals, comprising:

receiving, from a source, a first signal and a second signal by a receiving apparatus of a receiving system, the first and second signals to be synchronously displayed on a display apparatus of the receiving system, the first and second signals having been time-synchronized at the source, the first signal having content of a first modality and a first plurality of time stamps originating from the source, the second signal having content of a second modality and a second plurality of time stamps originating from the source, the second plurality of time stamps being synchronized with the first plurality of time stamps;

determining at a plurality of times on a real-time clock C_R at the receiving system whether the first and second signals are time-synchronized relative to the clock C_R , said determining being based on analyzing the first and second plurality of time stamps in relation to the clock C_R ; and

reducing the time rate of displaying one of the first signal and the second signal when said determining determines that the first and second signals are not time-synchronized relative to the clock C_R such that the one is time advanced relative to the remaining other of the first signal and the second signal, said reducing being directed to time-synchronizing said displaying of the first and second signals on the display apparatus.

30. The method of claim 29,

wherein the first signal is in an uncompressed format as received by the receiving apparatus, wherein each timestamp of the first plurality of timestamps includes a time corresponding to a location in the first signal at which said timestamp of the first plurality of timestamps is positioned,

wherein the second signal is in an uncompressed format as received by the receiving apparatus, and wherein each timestamp of the second plurality of timestamps

includes a time corresponding to a location in the second signal at which said timestamp of the second plurality of timestamps is positioned.

31. The method of claim 29,

5 wherein the first signal is in a compressed format as received by the receiving apparatus, wherein each timestamp of the first plurality of timestamps includes a time corresponding to a location in a first uncompressed signal which was compressed at the source to form the first signal, wherein said timestamp of the first plurality of timestamps further includes an identification of said location in the first uncompressed signal,

10 wherein the second signal is in a compressed format as received by the receiving apparatus, wherein each timestamp of the second plurality of timestamps includes a corresponding to a location in a second uncompressed signal which was compressed at the source to form the second signal, and wherein said timestamp of the second plurality of timestamps further includes an identification of said location in the second uncompressed
15 signal.

32. The method of claim 29,

 wherein the first signal is in an uncompressed format as received by the receiving apparatus, wherein each timestamp of the first plurality of timestamps includes
20 corresponding to a location in the first signal at which said timestamp of the first plurality of timestamps is positioned,

 wherein the second signal is in a compressed format as received by the receiving apparatus, wherein each timestamp of the second plurality of timestamps includes a time corresponding to a location in an uncompressed signal which was compressed at the source

to form the second signal, and wherein said timestamp of the second plurality of timestamps further includes an identification of said location in the uncompressed signal.

33. The method of claim 29, wherein said reducing is effectuated by a delay compensation
5 controller of the receiving apparatus.

34. The method of claim 29, wherein said reducing comprises introducing a time delay gap in the displaying of said one of the first signal and the second signal.

10 35. The method of claim 29, wherein said reducing does not comprise introducing a time delay gap in the displaying of said one of the first signal and the second signal.

36. The method of claim 29, wherein the first modality differs from the second modality.

15 37. The method of claim 36, wherein the first modality is a video modality, and wherein the second modality is an audio modality.

38. The method of claim 36, wherein the first modality is a video modality, and wherein the second modality is an text modality.

20

39. The method of claim 36, wherein the first modality is a text modality, and wherein the second modality is an audio modality.

40. The method of claim 29, wherein said receiving the first signal and the second signal
25 comprises receiving the first signal and the second signal on separate channels.

41. The method of claim 29, wherein said receiving the first signal and the second signal comprises receiving the first signal and the second signal as not multiplexed with each other.

5 42. The method of claim 29, wherein said receiving the first signal and the second signal comprises receiving the first signal and the second signal as multiplexed but not time-synchronized with each other.

43. A system for synchronizing signals, comprising:

10 receiving means for receiving, from a source, a first signal and a second signal by a receiving apparatus of a receiving system, the first and second signals to be synchronously displayed on a display apparatus of the receiving system, the first and second signals having been time-synchronized at the source, the first signal having content of a first modality and a first plurality of timestamps originating from the source, the second signal
15 having content of a second modality and a second plurality of timestamps originating from the source, the second plurality of time stamps being synchronized with the first plurality of time stamps;

determining means for determining at a plurality of times on a real-time clock C_R at the receiving system whether the first and second signals are time-synchronized relative to
20 the clock C_R , said determining being based on analyzing the first and second plurality of timestamps in relation to the clock C_R ; and

reducing means for reducing the time rate of displaying one of the first signal and the second signal when said determining determines that the first and second signals are not time-synchronized relative to the clock C_R such that the one is time advanced relative
25 to the remaining other of the first signal and the second signal, said reducing being directed

to time-synchronizing said displaying of the first and second signals on the display apparatus.

44. The system of claim 43,

5 wherein the first signal is in an uncompressed format as received by the receiving apparatus, wherein each timestamp of the first plurality of timestamps includes a time corresponding to a location in the first signal at which said timestamp of the first plurality of timestamps is positioned,

 wherein the second signal is in an uncompressed format as received by the
10 receiving apparatus, and wherein each timestamp of the second plurality of timestamps includes a time corresponding to a location in the second signal at which said timestamp of the second plurality of timestamps is positioned.

45. The system of claim 43,

15 wherein the first signal is in an uncompressed format as received by the receiving apparatus, wherein each timestamp of the first plurality of timestamps includes a time corresponding to a location in a first uncompressed signal which was compressed at the source to form the first signal, wherein said timestamp of the first plurality of timestamps further includes an identification of said location in the first uncompressed signal,

20 wherein the second signal is in an uncompressed format as received by the receiving apparatus, wherein each timestamp of the second plurality of timestamps includes a time corresponding to a location in a second uncompressed signal which was compressed at the source to form the second signal, and wherein said timestamp of the second plurality of timestamps further includes an identification of said location in the
25 second uncompressed signal.

46. The system of claim 43,

wherein the first signal is in an uncompressed format as received by the receiving apparatus, wherein each timestamp of the first plurality of timestamps includes a time
5 corresponding to a location in the first signal at which said timestamp of the first plurality of timestamps is positioned,

wherein the second signal is in an uncompressed format as received by the receiving apparatus, wherein each timestamp of the second plurality of timestamps includes a time corresponding to a location in a second uncompressed signal which was
10 compressed at the source to form the second signal, and wherein said timestamp of the second plurality of timestamps further includes an identification of said location in the second uncompressed signal.

47. The system of claim 43, wherein said reducing is effectuated by a delay compensation
15 controller of the receiving apparatus.

48. The system of claim 43, wherein said reducing comprises introducing a time delay gap in the displaying of said one of the first signal and the second signal.

20 49. The system of claim 43, wherein said reducing does not comprise introducing a time delay gap in the displaying of said one of the first signal and the second signal.

50. The system of claim 43, wherein the first modality differs from the second modality.

25 51. The system of claim 50, wherein the first modality is a video modality, and wherein the second modality is an audio modality.

52. The system of claim 50, wherein the first modality is a video modality, and wherein the second modality is an text modality.

- 5 53. The system of claim 50, wherein the first modality is a text modality, and wherein the second modality is an audio modality.

54. The system of claim 43, wherein said receiving means comprises means for receiving the first signal and the second signal on separate channels.

10

55. The system of claim 43, wherein said receiving means comprises means for receiving the first signal and the second signal as not multiplexed with each other.

56. The system of claim 43, wherein said receiving means comprises means for receiving the first signal and the second signal as multiplexed but not time-synchronized with each other.

1/5

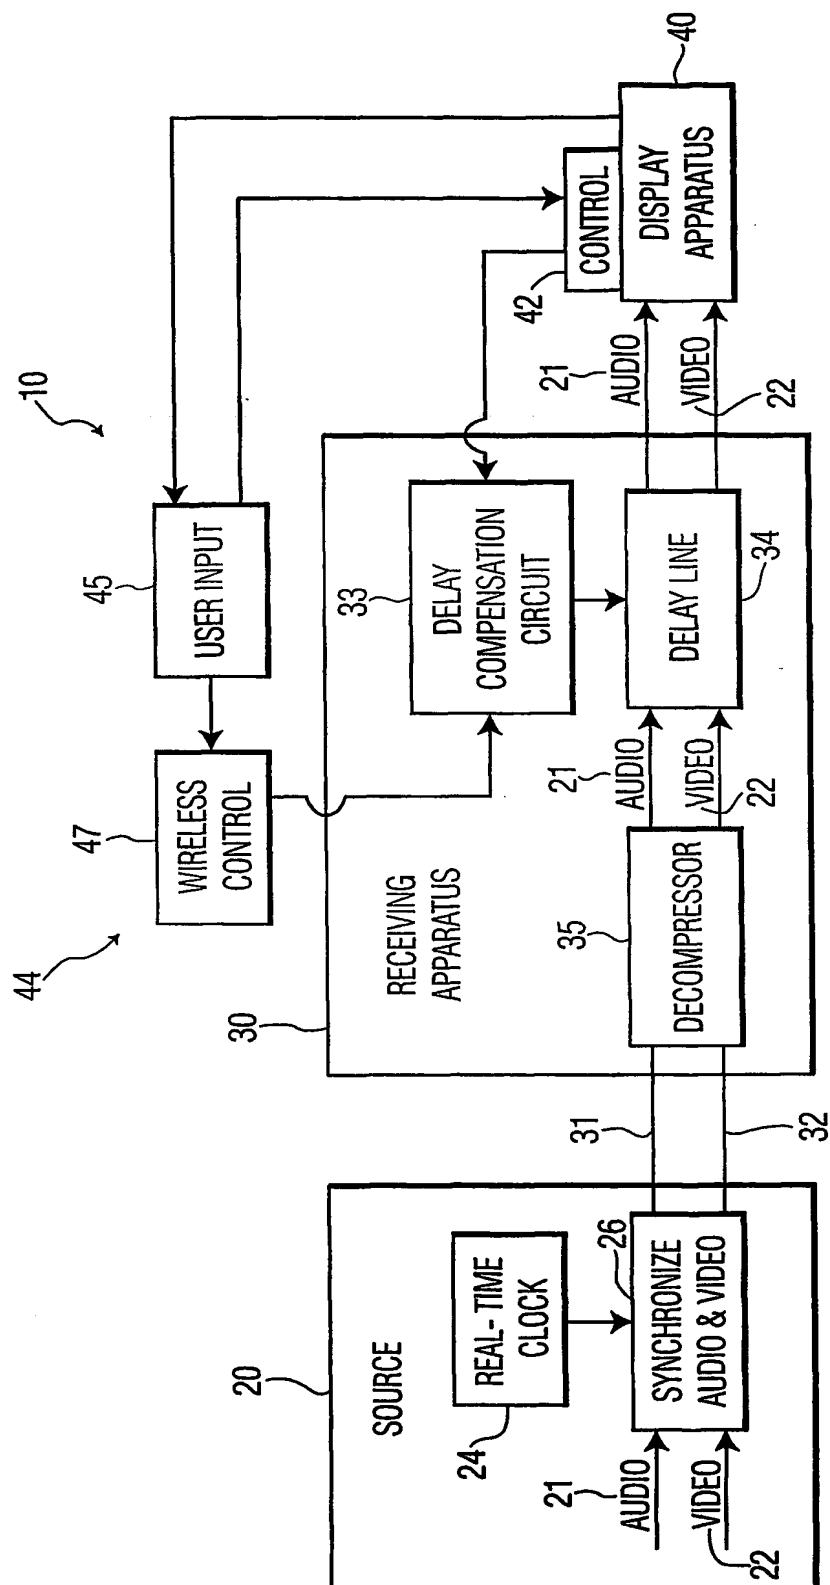


FIG. 1

2/5

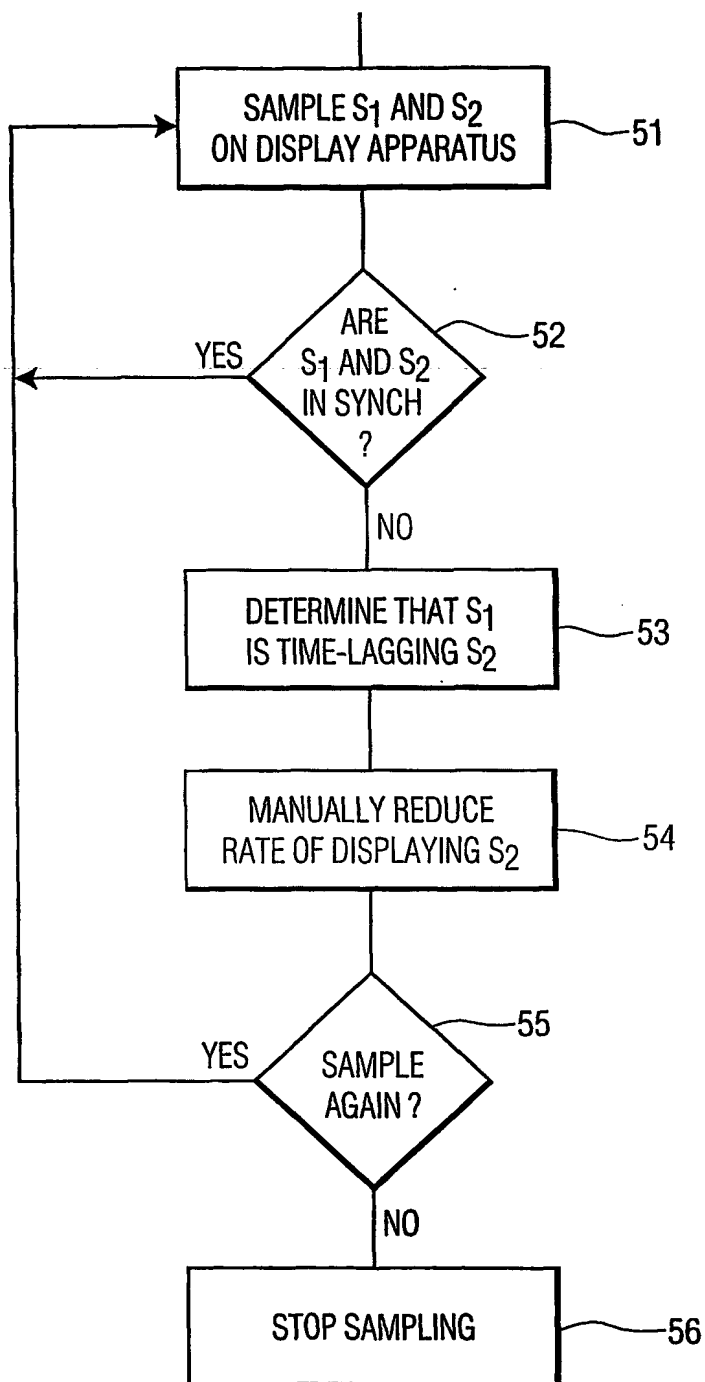


FIG. 2

3/5

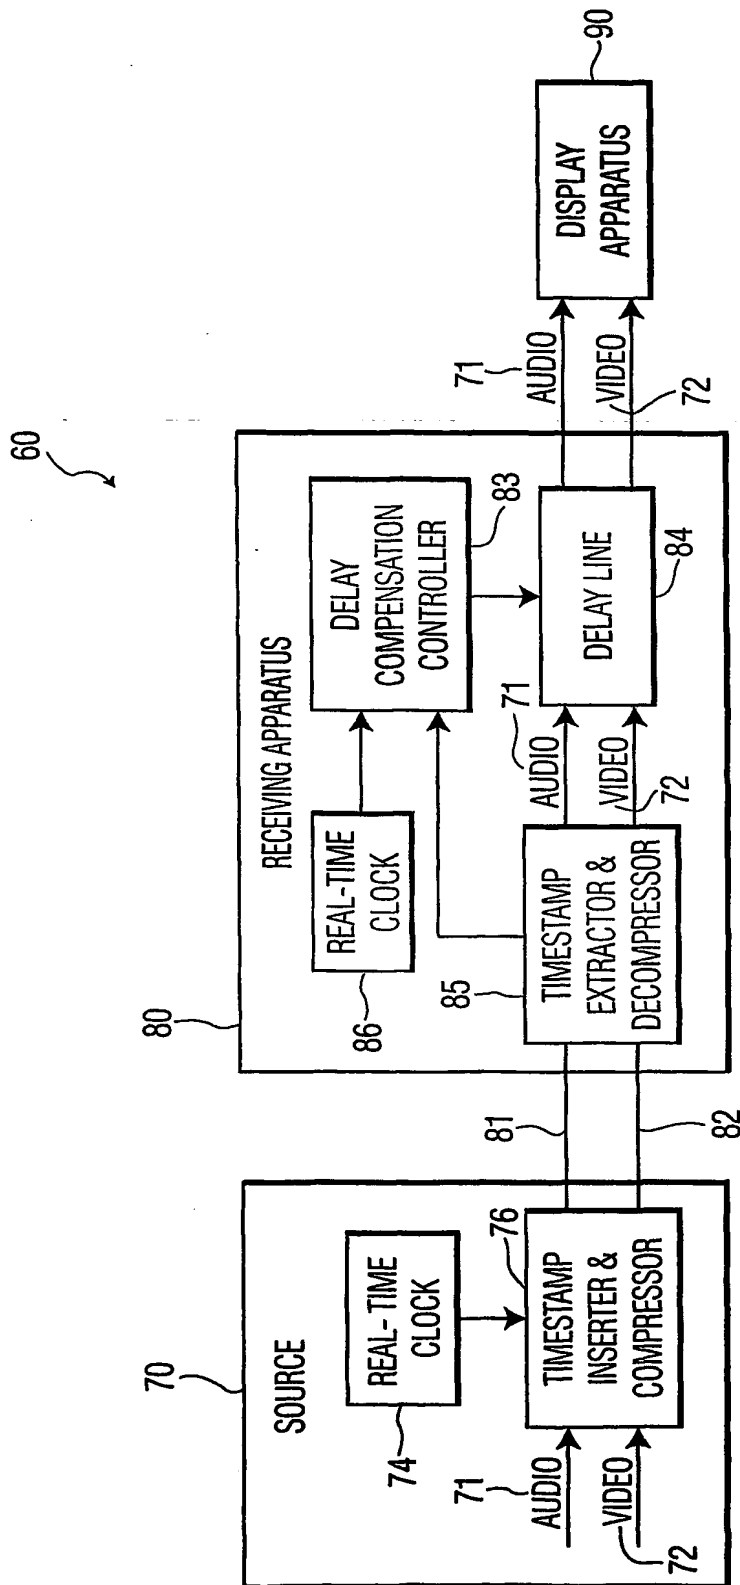


FIG. 3

4/5

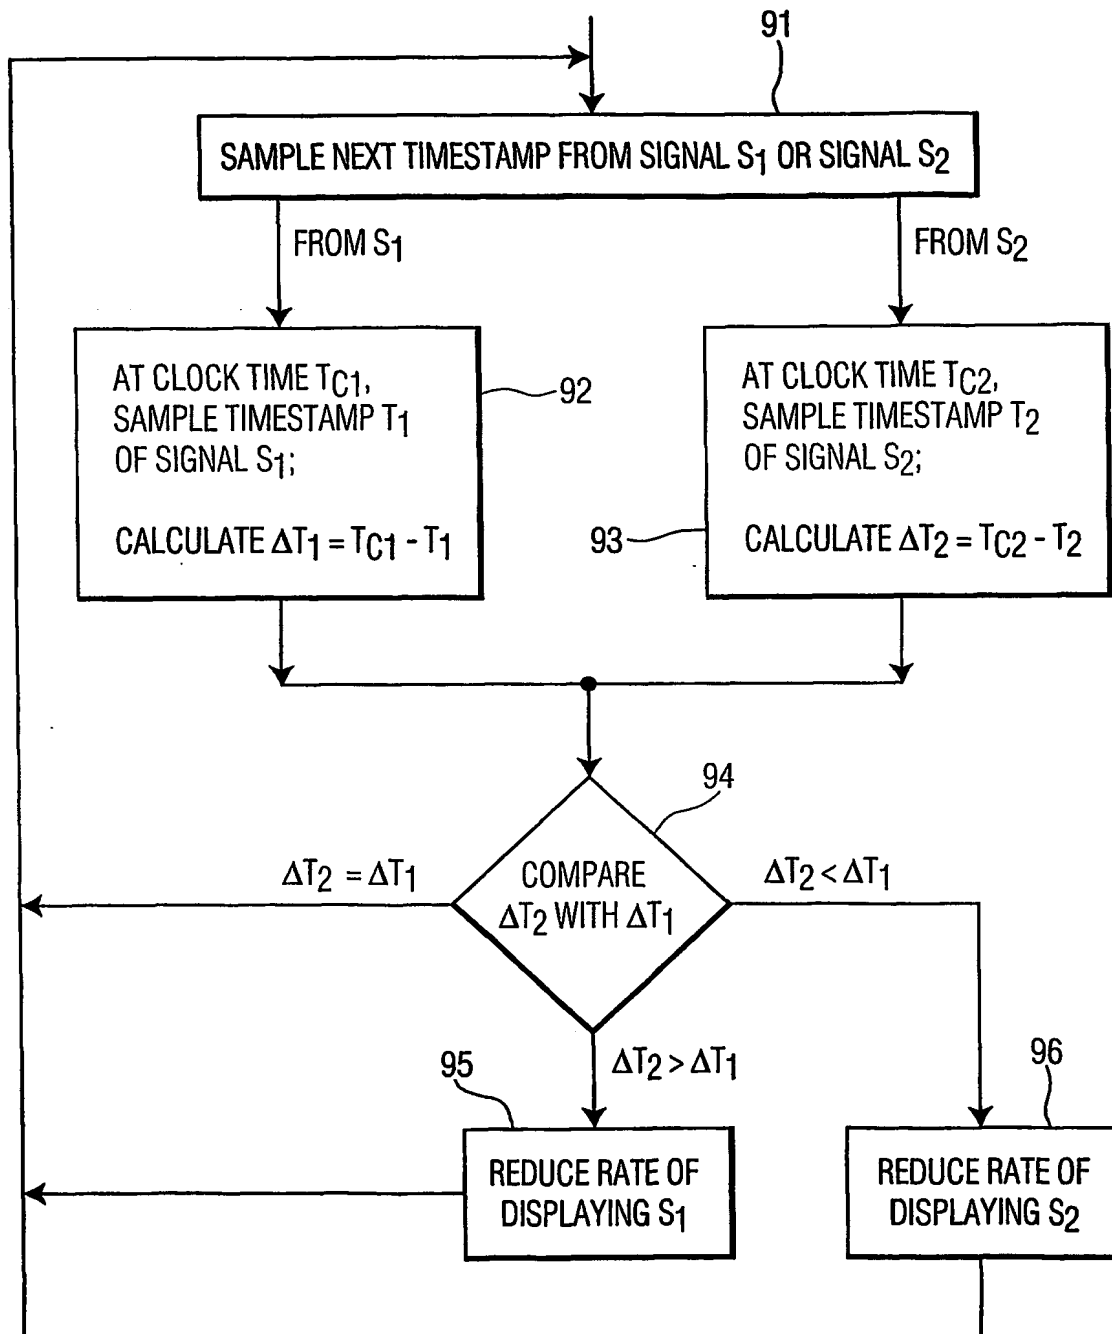


FIG. 4

5/5

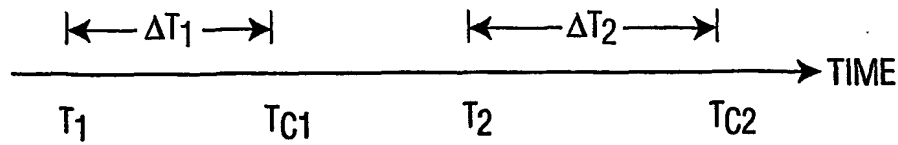


FIG. 5

TIMESTAMP CONTENTS BASED ON SIGNAL FORMAT

SIGNAL FORMAT	CONTENTS OF TIMESTAMP
UNCOMPRESSED	A TIME READ FROM CLOCK C_S AT SOURCE, THE TIME CORRESPONDING TO A LOCATION IN THE SIGNAL AT WHICH THE TIME STAMP IS POSITIONED
COMPRESSED	<p>1) A TIME READ FROM CLOCK C_S AT SOURCE, THE TIME CORRESPONDING TO A LOCATION IN A AN UNCOMPRESSED SIGNAL WHICH WAS COMPRESSED AT THE SOURCE TO FORM THE SIGNAL; AND</p> <p>2) AN IDENTIFICATION OF SAID LOCATION IN THE UNCOMPRESSED SIGNAL</p>

FIG.6

EXAMPLES OF SIGNAL MODALITY COMBINATIONS

EXAMPLE	MODALITY OF FIRST SIGNAL S_1	MODALITY OF SECOND SIGNAL S_2
1	VIDEO	AUDIO
2	VIDEO	TEXT
3	AUDIO	TEXT

FIG. 7

INTERNATIONAL SEARCH REPORT

Inter. Int'l Application No

PCT/IB/05440

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 H04N7/52

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X A	US 2002/103919 A1 (HANNAWAY G WYNDHAM) 1 August 2002 (2002-08-01) abstract paragraphs '0005! - '0007!, '0010! - '0012!, '0019!, '0021!, '0023!, '0024!, '0025!, '0026!, '0027!, '0028!, '0029!, '0030!, '0033!, '0036!, '0037! figures 1,2 ----- -/--	29, 31, 33-43, 45, 47-56 1-28

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

20 April 2004

Date of mailing of the international search report

28/04/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3018

Authorized officer

Marzal-Abarca, X

INTERNATIONAL SEARCH REPORT

Internat Application No

PCT/IB/05440

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	<p>US 5 844 600 A (KERR GORDON) 1 December 1998 (1998-12-01)</p> <p>abstract column 2, line 48 - column 3, line 54 column 6, lines 30-58 column 7, line 15 - column 8, line 7 column 8, lines 39-42 column 9, lines 31-62 column 10, line 28 - column 12, line 32 figures 2a, 2b, 3a, 3b, 5c, 6a, 6b</p>	29-37, 40, 41, 43-51, 54, 55
X	<p>US 2002/140859 A1 (KARIATSUMARI TAKAKI) 3 October 2002 (2002-10-03) paragraphs '0014!, '0018!, '0019!, '0038!, '0041!, '0044!, '0047!, '0048!, '0049!, '0050!, '0051!, '0052!, '0053!, '0054!, '0055!, '0056!, '0057! figures 1, 3, 4</p>	1-9, 14-23, 28
X	<p>WO 02/060178 A (DIGEO INC) 1 August 2002 (2002-08-01) page 1, lines 23-27 page 2, lines 12-16 page 12, lines 3-24 claim 16 figures 1-10</p>	1-13, 15-27
X	<p>US 5 953 049 A (MANE AMIR M ET AL) 14 September 1999 (1999-09-14) column 1, line 41 - column 2, line 22 column 3, line 39 - column 4, line 67 column 5, lines 46-58 column 10, lines 30-42 column 12, lines 17-57 claims 5, 6 figures 2a, 2b, 3a, 4, 5</p>	1-9, 14-23, 28
X	<p>EP 1 259 082 A (PIONEER CORP) 20 November 2002 (2002-11-20)</p> <p>paragraphs '0001!, '0002!, '0003!, '0004!, '0005!, '0009!, '0010!, '0028!, '0029!, '0030!, '0031!, '0032!, '0033!, '0045!, '0047!, '0048! figures 1-4</p>	1-9, 12, 13, 15-23, 26, 27
A	<p>GB 2 195 810 A (SONY CORP) 13 April 1988 (1988-04-13) page 1, lines 19-40 page 3, lines 24-87 figures 1-5</p>	1-28

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PC171B 05440

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 2002103919	A1	01-08-2002	AU 9328501 A CA 2432158 A1 EP 1346579 A1 WO 0251155 A1	01-07-2002 27-06-2002 24-09-2003 27-06-2002
US 5844600	A	01-12-1998	CA 2231780 A1 EP 0850538 A1 WO 9710674 A1	20-03-1997 01-07-1998 20-03-1997
US 2002140859	A1	03-10-2002	JP 2002290932 A CN 1377185 A	04-10-2002 30-10-2002
WO 02060178	A	01-08-2002	US 6630963 B1 US 6710815 B1 WO 02060181 A1 WO 02060178 A1	07-10-2003 23-03-2004 01-08-2002 01-08-2002
US 5953049	A	14-09-1999	NONE	
EP 1259082	A	20-11-2002	JP 2002344898 A CN 1390032 A EP 1259082 A2 US 2002174440 A1	29-11-2002 08-01-2003 20-11-2002 21-11-2002
GB 2195810	A	13-04-1988	NONE	